



Spray with **Passion**
Demand **Quality**
Deliver with **Pride**



R-Series REDUCERS



R-Series REDUCERS

American Icon Urethane Grade Reducers are made from 100% virgin solvents and are formulated for use in urethane topcoats, clearcoats, primers, primer surfacers and primer sealers. They provide excellent leveling characteristics.

Read side two of sheet for product details.

REDUCERS		
PRODUCT	SIZE	CODE
R-S700 (Slow)	1 Gal	R-S70001
R-S700 (Slow)	1 qt.	R-S70004
R-M720 (Medium)	1 Gal	R-M72001
R-M720 (Medium)	1 qt.	R-M72004
R-F730 (Fast)	1 Gal	R-F73001
R-F730 (Fast)	1 qt.	R-F73004


2.1 VOC REDUCERS		
PRODUCT	SIZE	CODE
R-S701 (Slow 2.1)	1 Gal	R-S70101
R-M721 (Med 2.1)	1 Gal	R-M72101
R-F731 (Fast 2.1)	1 Gal	R-F73101

FOR USE WITH:

C-800 Icon Clear
C-820 Euro Clear
C-830 Universal Clear

Low VOC Products:

C-821 Euro Clear 2.1
C-831 Universal Clear 2.1

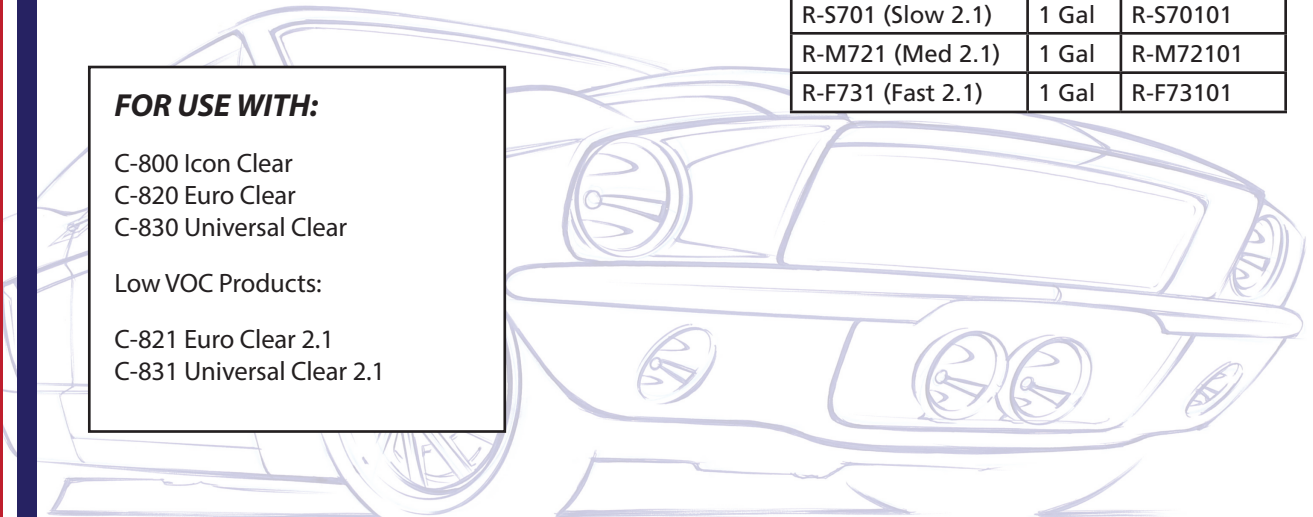



Spray with **Passion**
Demand **Quality**
Deliver with **Pride**

Product Data Sheet

R-Series REDUCERS

APPLICATION

Refer to individual product Technical Data Sheets for mixing and application instructions.

SAFETY INFORMATION

WARNING! COMBUSTIBLE LIQUID AND VAPOR! VAPOR HARMFUL. Contains Stoddard Solvent, 1,2,4-trimethylbenzene: MAY AFFECT THE BRAIN OR NERVOUS SYSTEM CAUSING DIZZINESS, HEADACHE, OR NAUSEA. MAY CAUSE EYE, SKIN, NOSE, AND THROAT IRRITATION. NOTICE: Repeated and prolonged exposure to solvents may lead to permanent brain damage. Eye watering, headaches, nausea, dizziness and loss of coordination are signs that solvent levels are too high. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal. To avoid breathing vapors or spray mist, open window and doors or use other means to ensure fresh air entry during application and drying.

Keep away from heat and flame. Use only with adequate ventilation. Do not breathe vapors, spray mist or spraying dust. Do not get in eyes or on skin. WEAR A PROPERLY FITTED VAPOR/PARTICULATE RESPIRATOR APPROVED BY NIOSH FOR USE WITH PAINTS, eye protection, gloves, and protective clothing during application (or sanding) and until all vapors and spray mist are exhausted. In confined places or in situations where continuous spray operations are typical, or if proper respirator fit is not possible, wear a positive-pressure, supplied air respirator approved by NIOSH. In all cases, follow respirator manufacturer's directions. Do not permit anyone without protection in the painting area. Close container after each use.

FIRST AID

If affected by inhalation of vapors or spray mist, remove to fresh air. In case of eye contact, flush immediately with plenty of water for at least 15 minutes and call a physician. For skin, wash thoroughly with soap and water. In case of ingestion, DO NOT induce vomiting. Get medical help immediately.

IN CASE OF FIRE – Use foam, CO₂, dry chemical, or water fog.

IN CASE OF SPILL – Absorb with inert material and dispose of in accordance with applicable regulations.

DISPOSAL: Empty container with product residue may still be flammable; follow all hazard statements until it has been disposed of. Contains organic solvents which may cause adverse effects on the environment if disposed of improperly. Consult your sanitation department for more information on disposal of empty containers. Disposal of wastes containing either organic solvents or free-liquids in landfills is prohibited. Local requirements vary; contact your state-designated environmental agency for information concerning re-use, recycling, or disposal of solvent-borne paint.

**FOR PROFESSIONAL USE ONLY
NOT FOR RESIDENTIAL USE
KEEP OUT OF REACH OF CHILDREN**

Refer to Safety Data Sheet available from your dealer for further safety and handling information.



800-457-6715
PORproducts.com

P.O.R. Products, 38 Portman Rd, New Rochelle, NY 10801
© 2020 P.O.R. Products © POR-15 is a registered trademark of P.O.R. Products.